




**Net Free
Area Verified**

TSDA-4 FEATURES


- 2 ½" ring shank nails included
- Made from the same durable, long lasting and field tested material as the TopShield® Omni Series vents
- Fits roof pitches 3/12 to 16/12
- Unique design provides enhanced weather protection
- Integrated end plug every 2 inches
- 9 square inches of Net Free Area per linear foot
- Molded nail lines
- Slot width guidelines
- Patented design
- The TSDA-4 can be used as an intake vent (see reverse).
- **Lifetime Limited Warranty**

1. Engineered material guarantees longevity
2. Molded-in cut lines for tapered transitions
3. 10 supported nail holes
4. Shingle stop alignment tabs
5. Exterior baffle design prevents debris build-up
6. Fully supported tapered transition


TopShield® recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

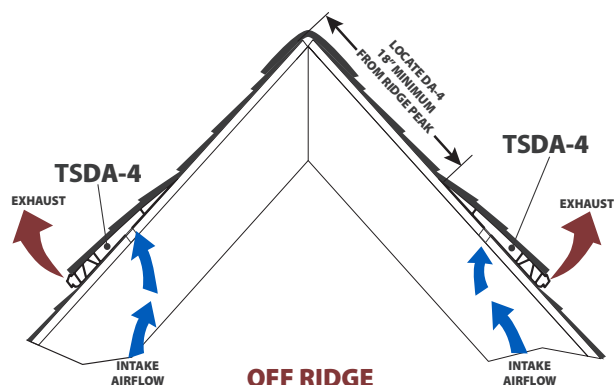

OFF RIDGE



ROOF MEETS WALL



SINGLE SLOPE



Want more info? Scan the QR code to access additional information on TopShieldProducts.com

SPECIFICATIONS

Model	Length (ft.)	Roof Pitch	NFA (in. ²)	Packaged
TSDA-4	4	3/12 to 16/12	36	10 per box



**Net Free
Area Verified**

TSDA-4 FEATURES

- 2 ½" ring shank nails included
- Made from the same durable, long lasting and field tested material as the TopShield® Omni Series vents
- Fits roof pitches 3/12 to 16/12
- Unique design provides enhanced weather protection
- Integrated end plug every 2 inches
- 9 square inches of Net Free Area per linear foot
- Molded nail lines
- Intake slot width guidelines
- Patented design
- The TSDA-4 can be used as an exhaust vent (see reverse).
- **Lifetime Limited Warranty**

1. Engineered material guarantees longevity
2. Molded-in cut lines for tapered transitions
3. 10 supported nail holes
4. Shingle stop alignment tabs
5. Low profile blends into roof profile
6. Exterior baffle design prevents debris build-up

TopShield® recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.



Want more info? Scan the QR code to access additional information on TopShieldProducts.com

SPECIFICATIONS

Model	Length (ft.)	Roof Pitch	NFA (in. ²)	Packaged
TSDA-4	4	3/12 to 16/12	36	10 per box